




Temperature Range	5-35°C, 41-95°F	Frost Protection (5°C - 17°C)	Y
White LED Screen	Y	Mesh Networking Facility	Y
Non-Programmable Mode (Default)	Y	°C / °F Option	Y
5/2 Day Programming Mode (with neoHub)	Y	Built In Air Sensor	Y
7 Day Programming Mode (with neoHub)	Y	Remote Air Sensing Mode	Y
24 Hour Mode (with neoHub)	Y	Floor Sensing Mode	Y
Number of Heating Levels (with neoHub)	4 or 6	Remote Probe Included	N
Optimum Start (with neoHub)	Y	Floor Temp Limit Protection	Y
Timer mode	N	Approach Sensor	Y
Holiday Function (with neoHub)	Y	Max Switching Current	3A Resistive
Keylock Function (with neoHub)	Y	Accuracy +/-	1°C
Temperature Hold Function (with neoHub)	Y	Adjustable Switching Differential	1°C - 3°C
Temperature Override	Y	<b>Supply</b>	<b>230V AC</b>
Temperature Override Limit (with neoHub)	Y	<b>Installed Dimensions</b>	<b>85x85x11mm (L,H,D)</b>
Output Delay (with neoHub)	Y	<b>Weight</b>	<b>137g</b>

Feature Table - Thermostat Mode (App Accessible only via neoHub)


DESCRIPTION	SETTING OPTIONS
Switching Differential	0.5°C, 1.0°C (Default) 2.0°C, 3.0°C
Frost Protection Temperature	07° - 17°C (12°C = Default)
Output Delay	00 - 15 Minutes (00 = Default)
Up/Down Temperature Limit	00° - 10°C (00 = Default)
Sensor Selection	Built in sensor (Default), Remote Air Sensor Only Floor Sensor Only, Built in & Floor Sensor Remote Air & Floor Sensor
Dew Point	Enable/Disable

DESCRIPTION	SETTING OPTIONS
Floor Temperature Limit	20° - 45°C (28°C = Default)
Cool Enable	Enable/Disable
Optimum Start	00 - 05 Hours (00 = Default)
Rate of Change	Minutes to raise by 1°C
Program Mode	Non-Programmable, Weekday/Weekend (Default) 7 Day Programming, 24 Hour Mode
Temperature Format	00 = °C, 01 = °F (00 = Default)

Product Dimensions (mm) & Wiring Specification

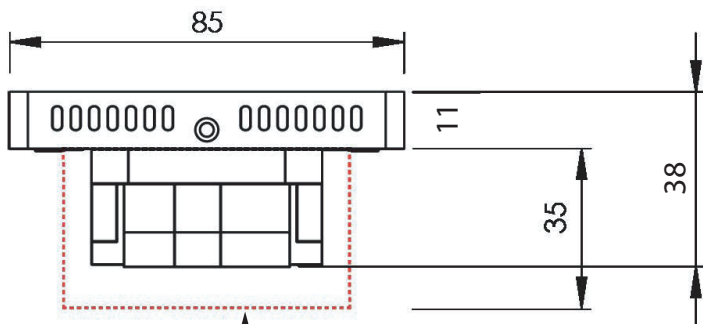

Back Box Area ↑  
Note: Fits standard 35mm depth back box

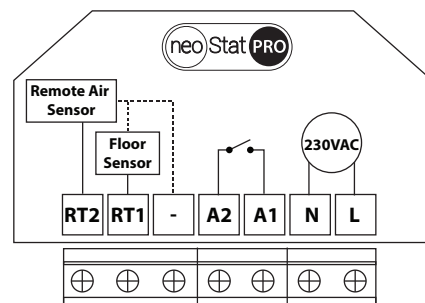

Wiring Detail

